

技术参数 Technique parameter

项目 Item	规格 Specifications
步距角精度 Step Angle Accuracy	± 5% (full step,no load)
电阻精度 Resistance Accuracy	± 10%
电感精度 Inductance Accuracy	± 20%
温升 Temperature Rise	80°CMax.(rated current,2 phase on)
环境温度 Ambient Temperature	-10°C- +50°C
绝缘等级 Insulation Resistance	100MΩ Min.500 VDC
介电强度 Dielectric Strength	500VAC for one minute
转轴径向跳动 Shaft Radial Play	0.02Max.(450 g-load)
转轴轴向跳动 Shaft Axial Play	0.08Max.(450 g-load)

技术规格 Technique Specification


型 号 Model No.	电压 Rated Voltage	电流 Current/Phase	电阻 Resistance /Phase	电感 Inductance /Phase	最大静力矩 Holding Torque	引线 #Of Leads	重量 Weight	机身长 Length
	V	A	Ω	mH	Oz-in g-cm		Kg	mm
36H12HM-0304A	6.2	0.3	16.8	8	4.44 320	4	60	12.5
36H20HM-0504A	6.0	0.5	12	9	15.3 1100	4	130	19.5

MODEL:36H12HM-0304A
VOLTAGE:24VDC

CURRENT:0.3A
FULL STEP

A

Torque(g-cm)

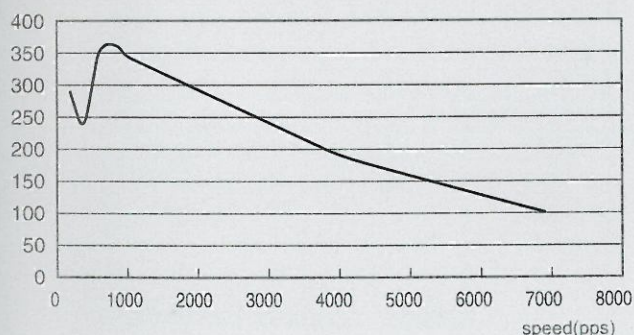


MODEL:36H20HM-0504
VOLTAGE:24VDC


CURRENT:0.5A
FULL STEP

B

Torque(g-cm)

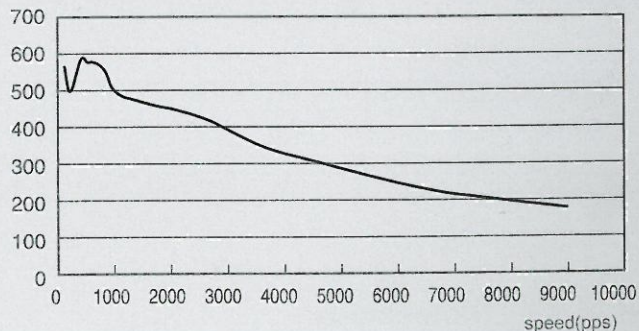

机械尺寸 Dimensions

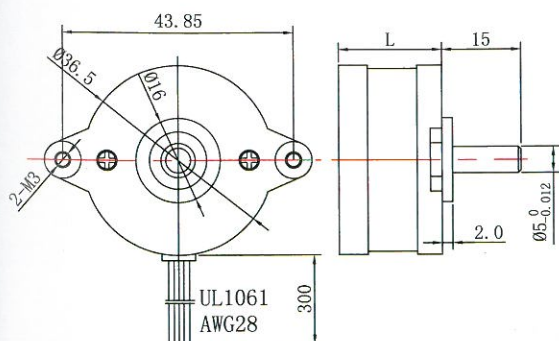

绕线图 Wiring Diagram

