



## 23H2 (2 phases 1.8°)

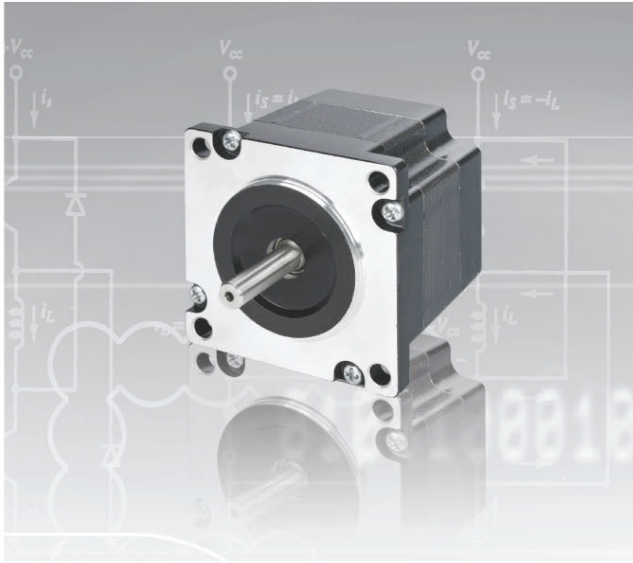

### Pull out torque-speed curves

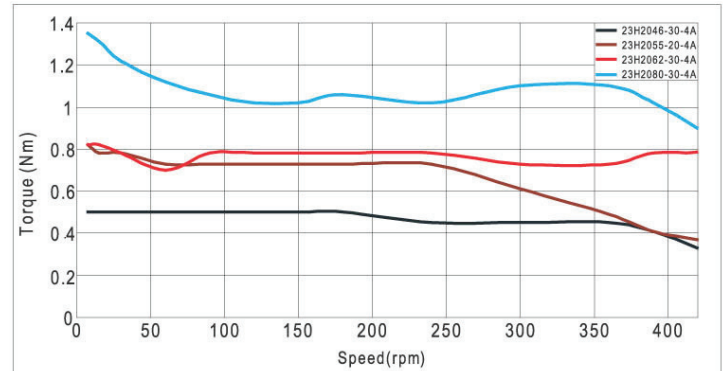

36V DC Chopper driver , 2 phases on

### Specifications

| Model         | Holding torque<br>Nm | Current<br>A/phase | Resistance<br>$\Omega$ /phase | Step angle | Rotor inertia<br>g $\cdot$ cm <sup>2</sup> | Weight<br>kg | Motor Length<br>L(mm) |
|---------------|----------------------|--------------------|-------------------------------|------------|--------------------------------------------|--------------|-----------------------|
| 23H2046-10-4A | 0.65                 | 1.0                | 4.8                           | 1.8°       | 120                                        | 0.5          | 46                    |
| 23H2046-20-4A | 0.65                 | 2.0                | 1.3                           | 1.8°       | 120                                        | 0.5          | 46                    |
| 23H2046-30-4A | 0.65                 | 3.0                | 0.58                          | 1.8°       | 120                                        | 0.5          | 46                    |
| 23H2055-10-4A | 1.0                  | 1.0                | 6.0                           | 1.8°       | 200                                        | 0.7          | 55                    |
| 23H2055-20-4A | 1.0                  | 2.0                | 1.6                           | 1.8°       | 200                                        | 0.7          | 55                    |
| 23H2055-30-4A | 1.0                  | 3.0                | 0.7                           | 1.8°       | 200                                        | 0.7          | 55                    |
| 23H2062-10-4A | 1.2                  | 1.0                | 6.5                           | 1.8°       | 300                                        | 0.85         | 62                    |
| 23H2062-20-4A | 1.2                  | 2.0                | 1.8                           | 1.8°       | 300                                        | 0.85         | 62                    |
| 23H2062-30-4A | 1.2                  | 3.0                | 0.8                           | 1.8°       | 300                                        | 0.85         | 62                    |
| 23H2080-20-4A | 2.0                  | 2.0                | 2.5                           | 1.8°       | 480                                        | 1.15         | 80                    |
| 23H2080-30-4A | 2.0                  | 3.0                | 1.0                           | 1.8°       | 480                                        | 1.15         | 80                    |
| 23H2080-40-4A | 2.0                  | 4.0                | 0.65                          | 1.8°       | 480                                        | 1.15         | 80                    |

### Dimensions

