





34H2 (2 phases 1.8°)

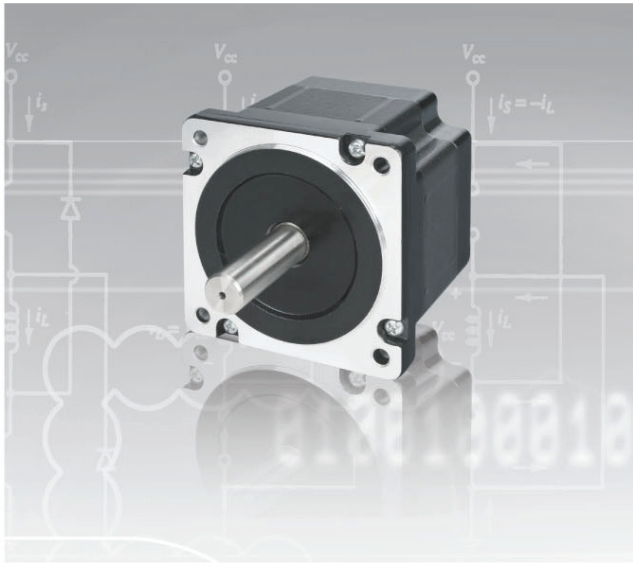

Pull out torque-speed curves

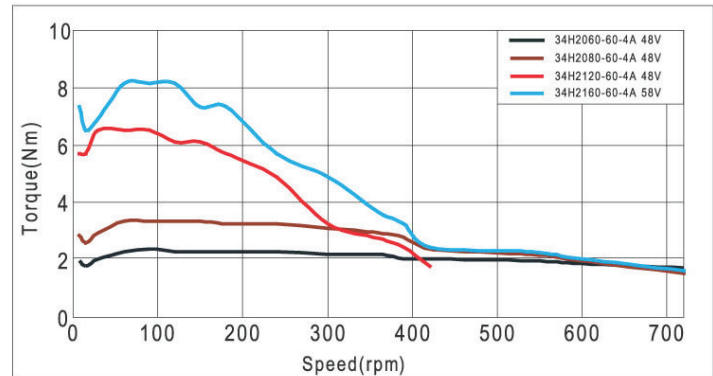

48V DC Chopper driver

Specifications

Model	Holding torque Nm	Current A/phase	Resistance Ω /phase	Step angle	Rotor inertia gcm ²	Weight kg	Motor Length L(mm)
34H2060-30-4A	2.8	3.0	1.1	1.8°	1000	1.7	60
34H2060-45-4A	2.8	4.5	0.5	1.8°	1000	1.7	60
34H2060-60-4A	2.8	6.0	0.3	1.8°	1000	1.7	60
34H2080-30-4A	4.4	3.0	1.5	1.8°	1600	2.4	80
34H2080-45-4A	4.4	4.5	0.65	1.8°	1600	2.4	80
34H2080-60-4A	4.4	6.0	0.4	1.8°	1600	2.4	80
34H2120-30-4A	8.4	3.0	2.3	1.8°	3200	4.0	120
34H2120-45-4A	8.4	4.5	1	1.8°	3200	4.0	120
34H2120-60-4A	8.4	6.0	0.6	1.8°	3200	4.0	120
34H2160-40-4A	12.0	4.0	1.4	1.8°	4800	5.5	160
34H2160-60-4A	12.0	6.0	0.7	1.8°	4800	5.5	160
34H2160-80-4A	12.0	8.0	0.38	1.8°	4800	5.5	160

Dimensions

