



34H3 (3 phases 1.2°)

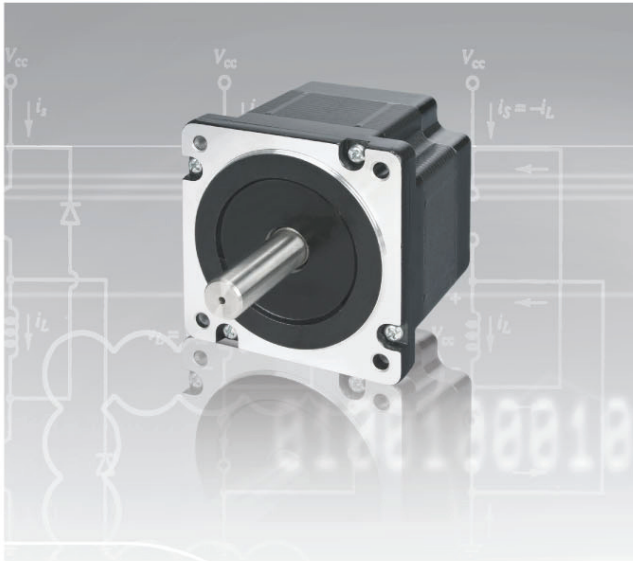

Pull out torque-speed curves

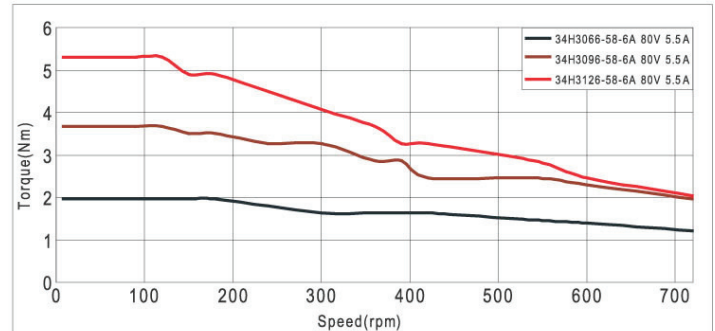

80V AC Chopper driver

Specifications

Model	Holding torque Nm	Current A/phase	Resistance Ω /phase	Step angle	Rotor inertia g $\cdot$ cm ²	Weight kg	Motor Length L(mm)
34H3066-18-6A	2.6	1.0	8.3	1.2°	1100	1.7	66
34H3066-44-6A	2.6	2.5	1.4	1.2°	1100	1.7	66
34H3066-58-6A	2.6	3.3	0.83	1.2°	1100	1.7	66
34H3096-20-6A	5.4	1.1	10.3	1.2°	2200	2.8	96
34H3096-50-6A	5.4	3.0	1.74	1.2°	2200	2.8	96
34H3096-58-6A	5.4	3.3	1.3	1.2°	2200	2.8	96
34H3126-23-6A	7.6	1.3	11.2	1.2°	3300	3.8	126
34H3126-50-6A	7.6	3.0	2.4	1.2°	3300	3.8	126
34H3126-58-6A	7.6	3.3	1.8	1.2°	3300	3.8	126

Dimensions

