

## Specifications

## Outline


## Curve

| Model       | Current | Resistance        | Inductance    | Holding torque |       | Inertia           | Length | Weight |     | Download |
|-------------|---------|-------------------|---------------|----------------|-------|-------------------|--------|--------|-----|----------|
|             | A       | $\Omega \pm 10\%$ | mH $\pm 20\%$ | N·m            | OZ·in | g/cm <sup>2</sup> | mm MAX | Kg     | Lbs |          |
| 24IP270-02  | 2.0     | 1.8               | 6.0           | 1.5            | 212   | 340               | 70     | 0.8    | 1.8 |          |
| 24IP270-03  | 3.0     | 0.8               | 2.5           | 1.5            | 212   | 340               | 70     | 0.8    | 1.8 |          |
| 24IP270-04  | 4.0     | 0.4               | 1.4           | 1.5            | 212   | 340               | 70     | 0.8    | 1.8 |          |
| 24IP2100-03 | 3.0     | 1.3               | 5.0           | 3.0            | 425   | 690               | 100    | 1.4    | 3.1 |          |
| 24IP2100-04 | 4.0     | 0.8               | 3.0           | 3.0            | 425   | 690               | 100    | 1.4    | 3.1 |          |
| 24IP2100-05 | 5.0     | 0.4               | 2.0           | 3.0            | 425   | 690               | 100    | 1.4    | 3.1 |          |

## Specifications


## Outline

## Curve

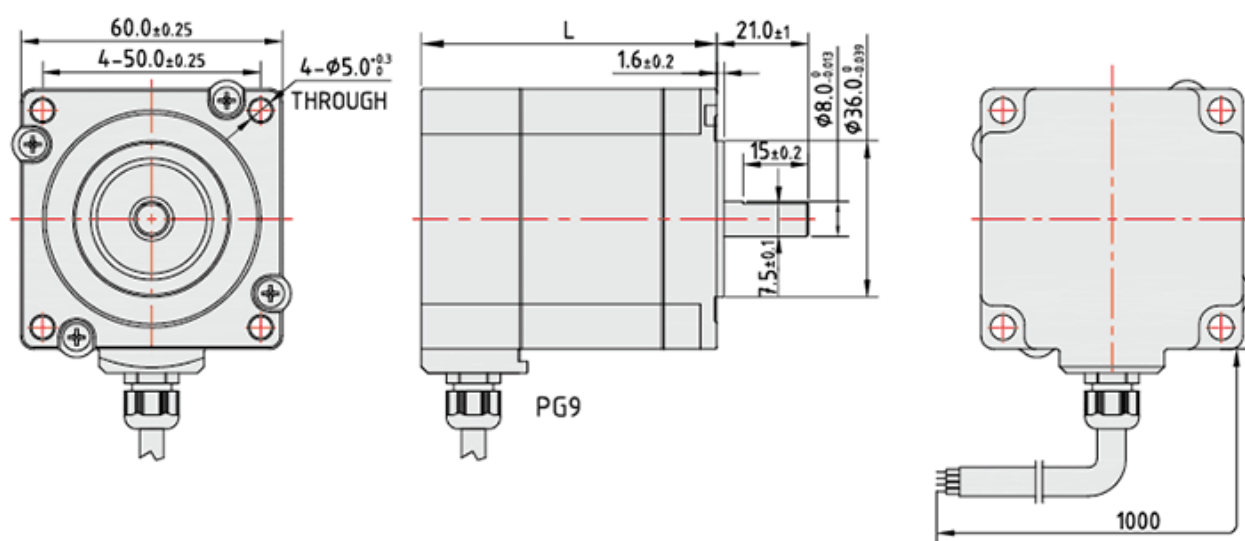

驱动方式: 恒流驱动  
驱动电压: DC48V  
励磁方式: 2相

Drive Mode: Constant Current Drive  
Voltage: DC48V  
Excitation Mode: Bipolar

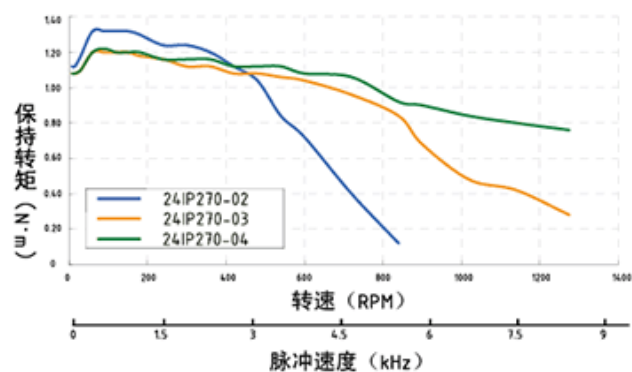

驱动方式: 恒流驱动  
驱动电压: DC48V  
励磁方式: 2相

Drive Mode: Constant Current Drive  
Voltage: DC48V  
Excitation Mode: Bipolar

